

# DATAMAN 150/260 SERIES BARCODE READERS

For 1-D linear barcodes, printed higher-density 2-D matrix codes, and direct part mark (DPM) codes, the DataMan<sup>®</sup> 150/260 series fixed-mount, image-based ID readers deliver unprecedented performance, flexibility and ease of use.



# Features at-a-glance

- High read rates
- Modular lighting, optics and configuration
- Easy to use
- No moving parts
- Performance feedback

#### **Highest read rates**

DataMan 150/260 series fixed-mount barcode readers achieve the highest possible read rates thanks to a high-speed, powerful platform that runs the latest Cognex algorithms.

1DMax® with Hotbars II™ technology decodes damaged or poorly printed 1-D barcodes as small as 0.8 pixels per module (PPM). 2DMax® provides reliable 2-D code reading independent of code quality, printing method, or the surface that the codes are marked on, and with patent-pending PowerGrid™ technology, can locate and read 2-D codes that exhibit significant damage to or complete elimination of the finder pattern, clocking pattern, or quiet zone.













1DMax with Hotbars II technology deliver high-speed reading of damaged or poorly printed 1-D barcodes as small as 0.8 pixels per module (ppm).

2DMax with PowerGrid technology provides reliable reading of challenging 2-D codes, including previously unreadable 2-D codes without visible perimeters, even when the codes exhibit significant damage to or complete elimination of the finder pattern, clocking pattern, and quiet zone.

# Simplify installation in tight spaces

DataMan 150/260 series models offer straight or right-angled configurations to fit into the tightest spaces. In-line and ninety degree configurations eliminate the need for equipment redesign, and complicated optical paths with mirrors.

## Reduce installation time and cost of ownership

Modular lighting and optics make it easy to change DataMan 150 and 260 series reader lenses and lighting in the field. This not only reduces installation time and resources, but protects the ID reader investment by making it easy to optimize performance for each application and accommodate future process changes.

For example, if the surface finish of the part or the background material warrants a new light wavelength to optimize image formation, just change the on-board lighting instead of buying a new barcode reader. Likewise, if the reader must be moved further away from the code, just change from a standard 6.2 mm lens to a 16 mm lens. There is also an option to have autofocus capability by installing a liquid lens for both 6.2 mm and 16 mm focal lengths.

## Easy to use tune and trigger buttons

The Tune and Trigger buttons allow for the setup of the application all without a PC or HMI. After mounting the reader, simply press the Tune button. Whether the code is label based or a DPM code, the tuning algorithm trains the code and automatically adjusts the optics and lighting to deliver an image optimized for your application.

Once the reader has been tuned, the trigger button makes it easy to confirm that the reader has been set up properly. Audible beep or visual LED feedback makes it easy to know when the code is correctly read.

#### Tune and Trigger Buttons





#### Perfect for DataMan 100/200 series retrofits

The DataMan 150/260 series readers utilize the same mounting configuration and pin out as the DataMan 100/200 series ID readers. This provides easy retrofits into existing DataMan 100/200 applications without adapter plates, or changes to mounting holes and wiring.

Because DataMan 150/260 and 100/200 models have equal standoff distances and fields of view, retrofits require no changes to the machine layout, hardware or application.

#### Compatibility for easy retrofits

DataMan 150/260 series communications, field of view, mounting holes and pin out are compatible with the DataMan 100/200 series readers.



DataMan 150/260 Series Barcode Readers 2

# Optimal image formation for any code

Codes on round, shiny, highly reflective, or specular surfaces very often require custom illumination to allow them to be read reliably. Low resolution codes and codes at long working distances also present reading challenges. Cognex's modular technology makes reading these codes simple.

**16 mm lens**—compared to the standard 6.2 mm lens, this lens can read smaller codes and codes at further working distances.

**Liquid lens technology**—the liquid lens module gives you the ability to perform autofocus with no moving parts.

**High-powered Integrated Light (HPIL)**—four high-powered red LEDs direct more light onto the code for better image formation. This feature is particularly useful for long distance code reading and high speed applications.

Half-polarized front cover—2 polarized LEDs and 2 unpolarized LEDs can be configured for custom lighting for any application. The polarized LEDs are ideal for shiny, specular surfaces, while the unpolarized LEDS are for long distance and high speed applications. Fully polarized and un-polarized front covers are also available, and can be easily interchanged.

By simply pressing the Tune button on the reader, the reader automatically optimizes the lighting levels, focus, and lighting scheme for best image formation.



#### **MODELS**

		2-D Barcoo	de Reading			& 1-D Reading	1-D Barcode Reading						
	Direct Part Mark (DPM)	High Speed	Slow Speed	Multiple Codes	Mixed Codes	Challenging Codes	High Speed	Slow Speed	Multiple Codes	Omnidirec tional	Oriented		
DataMan 150/152 QL 260/262 QL							•	•	•	•	•		
DataMan 150/152 S 260/262 S			•	•	•	•		•	•	•	•		
DataMan 150/152 Q 260/262 Q		•	•	•	•	•	•	•	•	•	•		
DataMan 150/152 X 260/262 X	•	•	•	•	•	•	•	•	•	•	•		

#### **QL Models**

Best-in-class 1-D barcode reading with 1DMax™, which is optimized for omnidirectional barcode reading. QL models are field upgradeable to the Q model.

#### **S** Models

For slow-moving parts or index motion where parts have well-marked 1-D and 2-D codes.

#### **O** Models

High-performance code reading of 1-D and 2-D codes on fast-moving parts. Includes 1DMax and ID Quick™ technologies.

#### X Models


High-performance code reading for applications that require reading challenging 1-D and 2-D codes, including Direct Part Mark (DPM) codes. X Models can also include patent pending PowerGrid™ technology to read codes without visible perimeters.

3

DataMan 150/260 Series Barcode Readers

# **Field of View and Reading Distances**



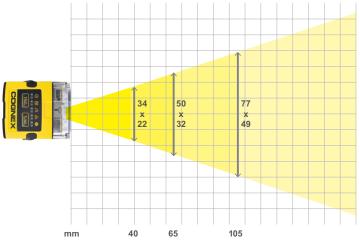

#### Reading distances


		@40		@65	@105			
1D	30 mil 15 mil 6 mil	45–90 mm * 45–70 mm 28–51 mm	30 mil 15 mil 6 mil	45–170 mm * 45–103 mm * 45–82 mm	15 mil 6 mil	45–170mm * 70–120 mm		
2D	30 mil 15 mil 10 mil 5 mil	25–95 mm 20–70 mm 25–60 mm 40–50 mm	30 mil 15 mil 10 mil	25–160 mm 35–120 mm 45–100 mm	30 mil 15 mil 10 mil	25–265 mm 55–200mm 75–160 mm		

<sup>\*</sup> min. Distance limited by code size



# DataMan barcode reader quick setup app


This convenient web-based app allows you to remotely set up and configure your networked Ethernet-based fixed-mount barcode readers on your phone or mobile device. Available from Google Play or iTunes App Store, this app allows you to see images in real-time, adjust and share configuration settings among multiple readers, save and send images, and much more. You can even troubleshoot issues and check read rates anywhere on your factory or distribution center floor without using a PC.

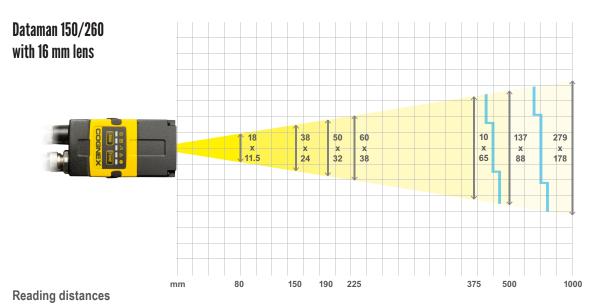

	@80 @150		@190	@225	@375	@500	@1000	
1D	30 mil 60–100 mm 15 mil 70–90 mm 6 mil 78–82 mm	30 mil 110–190 mm 15 mil 130–165 mm 6 mil 145–155 mm	30 mil 130–245 mm 15 mil 165–215 mm 6 mil 185–200 mm	30 mil 155–290 mm 15 mil 190–260 mm 6 mil 215–235 mm	30 mil 255–490 mm 15 mil 325–430 mm 6 mil 373–377 mm	30 mil 340–650 mm 15 mil 425–575 mm	30 mil 700–1250 mm	
2D	30 mil 60–100 mm 15 mil 75–85 mm 6 mil 78–82 mm	30 mil 115–185 mm 15 mil 140–160 mm 6 mil 148–152 mm	30 mil 140–235 mm 15 mil 170–210 mm 6 mil 185–195 mm	30 mil 170–275 mm 15 mil 200–250 mm 6 mil 223–227 mm	30 mil 280–470 mm 15 mil 335–415 mm	30 mil 370–625 mm 15 mil 450–515 mm	30 mil 800–1150 mm	

# **Field of View and Reading Distances**



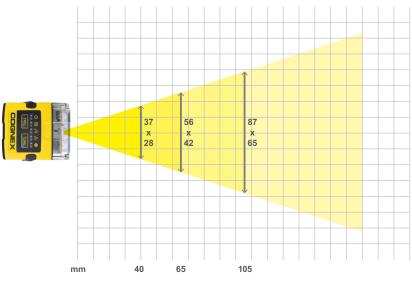


## Reading distances

		@40		@65	@105				
1D	30 mil	45–90 mm	30 mil	45–110 mm	30 mil	50–175 mm			
	15 mil	45–65 mm	15 mil	45–105 mm	15 mil	45–165 mm			
	12 mil	20–60 mm	12 mil	35–95 mm	12 mil	60–150 mm			
	10 mil	25–55 mm	10 mil	40–90 mm	10 mil	65–145 mm			
	8 mil	30–50 mm	8 mil	45–85 mm	8 mil	75–135 mm			
	6 mil	35–45 mm	6 mil	50–75 mm	6 mil	85–125 mm			

		@40		@65	@105				
2D	30 mil 15 mil 12 mil 10 mil 8 mil	25–95 mm 25–53 mm 28–50 mm 30–48 mm 32–45 mm	30 mil 15 mil 12 mil 10 mil 8 mil	50–100 mm 45–85 mm 50–80 mm 55–75 mm 58–72 mm	30 mil 15 mil 12 mil 10 mil 8 mil	50–175 mm 75–135 mm 80–130 mm 85–125 mm 90–120 mm			
	6 mil	35–42 mm	6 mil	60–70 mm	6 mil	95–115 mm			



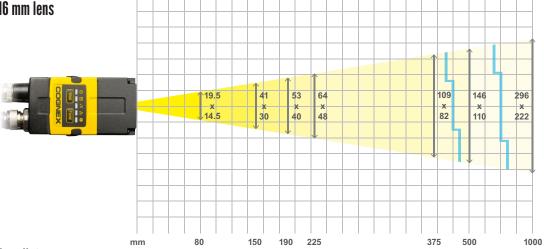

# Reading distances

	@80 @150			@190		@225	@375			@500	@1000			
1D	30 mil 15 mil 6 mil	55–105 mm 70–90 mm 78–85 mm	30 mil 15 mil 6 mil	105–195 mm 130–170 mm 142–158 mm	30 mil 15 mil 6 mil	130–250 mm 160–218 mm 180–198 mm	30 mil 15 mil 6 mil	152–295 mm 190–260 mm 212–235 mm	30 mil 15 mil 6 mil	250–490 mm 320–435 mm 355–395 mm	30 mil 15 mil 6 mil	335–660 mm 420–580 mm 475–525 mm	30 mil 15 mil	670–1300 mm 900–1100 mm
2D	30 mil 15 mil 6 mil	60–100 mm 75–87 mm 78–82 mm	30 mil 15 mil 6 mil	112–188 mm 135–165 mm 145–155 mm	30 mil 15 mil 6 mil	140–238 mm 168–210 mm 182–198 mm	30 mil 15 mil 6 mil	165–280 mm 198–252 mm 215–230 mm	30 mil 15 mil	275–475 mm 330–420 mm	30 mil 15 mil	370–630 mm 440–560 mm	30 mil	775–1200 mm

SPECIFICATIONS																	
	150 S	150 QL	150 Q	150 X	152 S	152 QL	152 Q	152 X	260 S	260 QL	260 Q	260 X	262 S	262 QL	262 Q	262 X	
1-D and Stacked Codes	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Omnidirectional 1-D Codes	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
2-D Codes	•		•	•	•		•	•	•		•	•	•	0 0 0 0 0 0	•	•	
Algorithms	1DMax IDQuick	1DMax	1DMax IDQuick	1DMax 2DMax*	1DMax IDQuick	1DMax	1DMax IDQuick	1DMax 2DMax*	1DMax IDQuick	1DMax	1DMax IDQuick	1DMax 2DMax*	1DMax IDQuick	1DMax	IDQuick	1DMax 2DMax*	
Image Resolution	75	2 x 480 G	lobal shut	ter	12	80 x 960 G	Global shu	ter	75	2 x 480 G	lobal shut	ter	12	80 x 960 C	Global shu	tter	
Image Sensor		1/3" (	CMOS			1/3"C	CMOS			1/3"0	CMOS			1/3"0	CMOS		
Acquisition		60	fps			45	fps			60	fps			45	fps		
Max Decode Rate	2/ Second	45 D	ecodes/Se	econd	2/ Second	45 D	ecodes/Se	econd	2/ Second	45 D	ecodes/Se	econd	2/ Second	45 D	45 Decodes/Second		
Lens Options	6.2 mm (3 position or liquid lens, 50250 mm), 16 mm (manual focus or liquid lens, 80 mm 1 m)																
Trigger and Tune Buttons	Yes. Quick Setup Intelligent Tuning																
Aimer								2 Green A	imer LEDs	;							
Discrete Inputs				2 opto-	isolated							2 opto-	isolated				
Discrete Outputs				2 opto-	isolated							4 opto-	isolated	lated			
Status Outputs							5 S	tatus LED	s and Bee	per							
Lighting			Мо	dular/Field	l Configura			dependen ilters & Po				s (Red, W	/hite, Blue,	IR)			
Power					SB bus po n compatil								24V +/- 10% er Etherne				
Power Consumption				<2.5 W	/ (USB)				<3.0 W (PoE or external power)								
Communication			RS	-232 and l	JSB Interf	ace					RS-2	32 and Et	hernet Inte	rface			
Material								Alum	inum								
Weight				12	8 g				142 g								
Dimensions					22.4mm x x 28.8(35.				Straight - 43.1 mm x 22.4 mm x 64 mm Right-Angle - 43.1 x 35.8 mm x 49.3 mm								
Operating Temperature							Tempera	ture (oper	ating) 0°C	– +40°C							
Storage Temperature							Tempera	ture (stora	ige) -10°C	–+60°C							
Operating and Storage Humidity							<	Hum 95% non-		ıg							
Protection								IP-	-65								
RoHS Certified								Ye	es								
Approvals (CE, UL, FCC)	Europ	ean Comr	nunity EN	Canada I 55022:200	rt 15, Clas CES-003 6 +A1:200 2003, EN6	7, Class A	., EN55024	1:1998	Austra		Já	apan J550 K0	2 / EN 550 22, Class CC 5 (2nd Editi	A		men t	

Operating System
\*PowerGrid Available

Corporate Headquarters One Vision Drive Natick, MA 01760 USA Tel: +1 508 650 3000 Fax: +1 508 650 3344

Americas

Americas +1 508 650 3000

Europe

Austria +49 721 6639 393
Belgium +31 403 05 00 43
France +33 1 4777 1551
Germany +49 721 6639 393
Hungary +36 1 501 0650
Ireland +0808 168 3001
Italy +39 02 6747 1200

Netherlands +31 403 05 00 43
Poland +48 71 776 07 52
Spain +34 93 445 67 78
Sweden +46 21 14 55 88
Switzerland +49 721 6639 393
Turkey +90 212 306 3120
United Kingdom +0808 168 3001

Asia
China +86 21 5050 9922
India +9120 4014 7840
Japan +81 3 5977 5400
Korea +82 2 539 9047
Singapore +65 632 55 700
Taiwan +886 3 578 0060

Windows 7 (32/64-bit) or Windows XP (32/64-bit)

© Copyright 2015, Cognex Corporation. All information in this document is subject to change without notice. All Rights Reserved. Cognex, the Cognex logo, Hotbars, 2DMax, DataMan and UltraLight are registered trademarks. Cognex Connect, Xpand and Cognex Explorer are trademarks of Cognex Corporation. All other trademarks are the property of their respective owners. Lit. No. DM150/260-DS-201509